



# High Power EYDFA **WISI LX 35**



### Description

LX 35 is an optical amplifier based on EYDFA technologie for use in HFC and FTTx networks. The system is available with different output power and various numbers of outputs.

### At one glance:


- Very high optical power with 38 dBm internally
- Stand-alone operation or integrated with WISI Optopus
- Management via SNMP, HTTP or custom options
- Carrier grade functions with hot pluggable and redundant power and fans

### Technical data

Type	LX 35	
Operating wavelength	1545...1565 nm	
Input power	0...+10 dBm	
Output power configurations	8x or 16x or 32x	14.0 dBm
	8x or 16x or 32x	17.0 dBm
	32x	20.0 dBm
	8x or 16x	21.0 dBm
Gain control range	3 dBm (with constant noise figure)	
Noise figure	≤ 5.5 dB (Noise figure @ 0 dBm input, nominal output power and signal wavelength 1550 nm)	
Return loss input/output	≥ 40 dB	
Isolation output input	≥ 40 dB	
Output power tolerance	± 0.5 dB	
Port uniformity	± 0.8 dB	
Optical test port	-20 dB	
<b>General data</b>		
Dimension (W x H x D)	483 mm x 44 mm x 455 mm (19", 1RU)	
Connector type	SC/APC	
Laser Class	1M	
Power supply units	1	
Slot for redundant power supply	1	
Supply voltage	230 V AC	
Power consumption	≤ 75 W (max. power consumption at end of lifetime and at max. operating temperature)	
Operating temperature range	-5...+45 °C (ETSI EN 300 019 -1-3 Class 3.2)	
<b>Accessories:</b>		
LXPS 0230	Redundant AC Power Supply for LX3x and LX52, 230V AC	
LXPS 0048	Redundant DC Power Supply for LX3x and LX52, 48V DC	

### Order information

LX 35 S xxxx

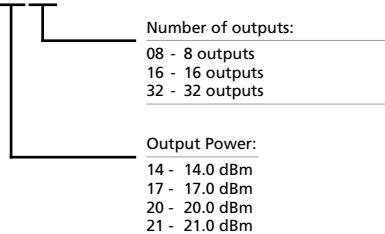

### WISI Communications GmbH & Co. KG

Empfangs- und Verteiltechnik  
 Wilhelm-Sihn-Str. 5-7  
 75223 Niefern-Oeschelbronn  
 Germany

Inland: Telefon +49 7233 66-0 Fax -320  
 Export: Telefon +49 7233 66-0 Fax -350  
 E-Mail: info@wisi.de